

SCIB-250 SUPERCHARGE INTERFACE BOX


The ETEC SuperCharge™ Interface Box SCIB-250 makes vehicle charging simple. The connection process changes from multiple steps to one single, easy step. The SCIB-250 eliminates the voltage present at the receptacle while not plugged into the charger and isolates the vehicle controller during charge.

Features of the ETEC SuperCharge™ SCIB-250:

- One-step charge connection process
- No voltage present on the charge receptacle when not connected to charger
- Ideal for converting existing electric GSE
- Rugged outdoor design-NEMA 3R enclosure
- Easy Installation, saves time and money
- Controller isolation during charge
- Interlock to prevent vehicle drive-off while charging
- Custom designs available for compatibility with any battery charge system.

Package Includes:

- Comes standard with BIW 400Amp inlet (Other connector inlets available at customer request)
- (1) SuperCharge CANOpen battery identifier
- (2) SB-350 Anderson Connectors for Easy Interface
- 250 Amp Albright Contactor, DPDT, with a 24-Volt AC Coil

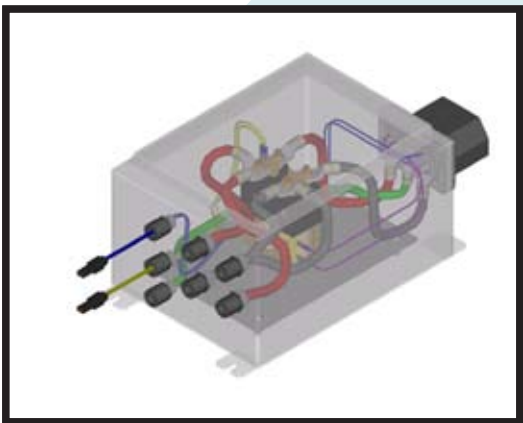

SPECIFICATIONS (SCIB-250)		SCIB-250
Continuous Input Current.....	250 Amps	
Dimensions (L/W/D).....	18"/12"/9.5"	
Weight.....	.35 lbs.	
Operating Temperature....	-25 Deg C to +40 Deg C	
Enclosure.....	Outdoor Rated	
Limited Warranty.....	1 Year Parts	

Contact:

Kevin Morrow
 430 S.2nd Ave
 Phoenix AZ 85003
 602-716-9576 ext.24
 kmorrow@etecevs.com
 www.etecevs.com