

SCIB-400 SUPERCHARGE INTERFACE BOX


The ETEC SuperCharge™ Interface Box SCIB-400 makes vehicle charging simple. The connection process changes from multiple steps to one single, easy step. The SCIB-400 eliminates the voltage present at the receptacle while not plugged into the charger and isolates the vehicle controller during charge.

Features of the ETEC SuperCharge™ SCIB-400:

- One-step charge connection process
- No voltage present on the charge receptacle when not connected to charger
- Ideal for converting existing electric GSE
- Rugged outdoor design-NEMA 3R enclosure
- Easy Installation, saves time and money
- Controller isolation during charge
- Interlock to prevent vehicle drive-off while charging
- Custom designs available for compatibility with any battery charge system.

Package Includes:

- Comes standard with BIW 400Amp inlet (Other connector inlets available at customer request)
- (1) SuperCharge CANOpen battery identifier
- (2) SB-350 Anderson Connectors for Easy Interface
- SW205AN Albright Contactor, DPDT, with a 24-Volt AC Coil

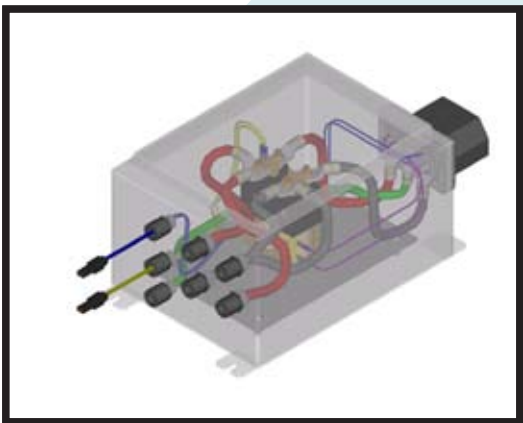

SPECIFICATIONS (SCIB-400)

Maximum Input Current.....	400Amps Peak
Continuous Input Current.....	350Amps
Dimensions (L/W/D).....	18"/12"/9.5"
Weight.....	35 lbs.
Operating Temperature....	-25 Deg C to +40 Deg C
Enclosure.....	Outdoor Rated
Limited Warranty.....	1 Year Parts

SCIB-400

Contact:

Kevin Morrow
 430 S.2nd Ave
 Phoenix AZ 85003
 602-716-9576 ext.24
 kmorrow@etecevs.com
 www.etecevs.com